

The most robust cleaver



Fiber Cleaver

Fujikura CT50



- Applicable for up to 12-fiber cleaving
- Automatic cleaving blade rotation via wireless communication
- User replaceable fiber clamps and cleaving blade
- Blade life up to 60,000 cleaves
- Wide lever opening angle allows easy fiber placement
- Single-action operation including fiber scrap collection

Newly Installed



Fujikura CT50

SPECIFICATIONS

| | | |
|--------------------------|---|---|
| Description | CT50 | |
| Applicable optical fiber | Silica optical fiber | |
| Fiber count | Up to 12 | |
| Cladding diameter | 125 μm | |
| Coating diameter | 160 to 900μm 2 to 3mm cord and drop cable | |
| Cleaving length | AD-10-M24 | 5mm to 20mm (coating diameter =250μm) |
| | AD-50 | 10mm to 20mm (coating diameter > 250μm) |
| Fiber holder | 10mm (from the edge of FH:13mm) | |
| Cleaving angle*1 | Typical 0.5 degrees | |
| Blade life | Typical 60,000 fibers | |
| Wireless connectivity | Wireless technical standard:Bluetooth®4.1 LE*2 OS : Andorid 5.0 or above, iOS 8.0 or above (iPhone6 above) | |
| Power supply | AAA (LR03) dry battery: 2pc | |
| Dimensions | 120(W) x 95(D) x 58(H)mm | |
| Weight | 300g | |
| Operation condition | 0 to 95% RH and 0 to 40°C (non-dew) | |
| Storage condition | 0 to 95% RH and -40 to 80°C (non-dew) | |
| Resistance features*3 | Shock: 76cm (30inch) all directions drop | |
| | Dust resistance: Exposure to dust (0.1 to 500μm dia. Alumina Silicate) | |
| | Rain resistance: H=10mm/hr for 10min | |

*1 The optical fiber type, the blade condition or the operating environment may affect the cleaving angle. Since the measuring device has been changed from an interference microscope to a fusion splicer, this specification value is now higher than that of the previous model (CT-30).


*2 The Bluetooth wireless connection of this product is not guaranteed to work with all smartphones or other devices.

*3 The shock resistance test does not guarantee the product will not be damaged under these conditions.

• Bluetooth and Bluetooth logo is a registered trademark of Bluetooth SIG, Inc.



STANDARD PACKAGE

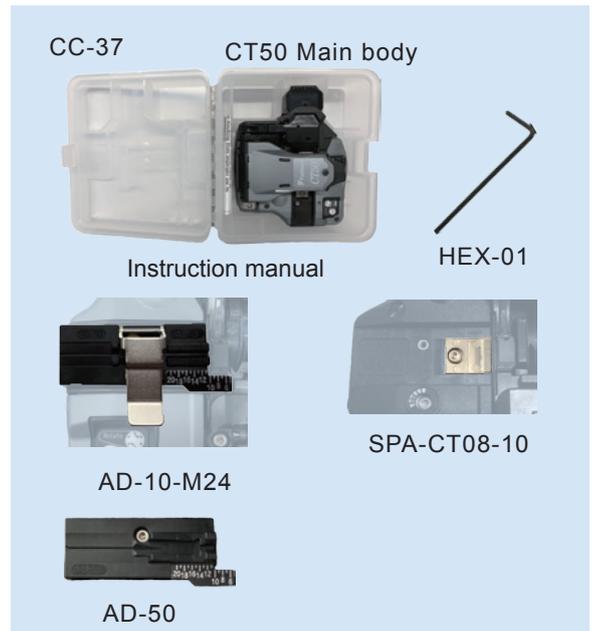

STANDARD PACKAGE

| Description | Model No. | Qty. |
|--------------------|-------------|------|
| Fiber plate | AD-10-M24 | 1pc |
| Fiber plate | AD-50 | 1pc |
| Spacer | SPA-CT08-10 | 1pc |
| Carrying case | CC-37 | 1pc |
| Hexagonal wrench | HEX-01 | 1pc |
| Instruction manual | M-CT50-E | 1pc |

OPTIONAL ITEMS

| Description | Model No. |
|--------------------|-------------|
| Blade | CB-08 |
| Arm set | ARM-CT50-01 |
| Dust box | FDB-05 |
| Blade rotary wheel | BRW-CT08-01 |
| Side cover | SC-CT50-01 |

OPTIONAL ITEMS



FIBER HOLDERS

| Description | Model No. |
|-------------------------|------------|
| Applicable fiber holder | FH-60-xxx |
| | FH-70-xxx |
| | FH-100-xxx |



Please visit our web site!

<https://www.fusionsplicer.fujikura.com>



Facebook

<https://www.facebook.com/FujikuraFusionSplicers>



twitter

<https://twitter.com/fujikurasplicer>

Specifications and descriptions are subject to change without prior notice. ©2018 Fujikura Ltd.

Fujikura Ltd.

1-5-1, Kiba, Koto-ku, Tokyo 135-8512, Japan
Phone:+81-3-5606-1164 Fax:+81-3-5606-1534 <http://www.fujikura.com>

Fujikura Asia Ltd.

438A Alexandra Road, Block A Alexandra Technopark #08-03 Singapore 119967
Phone:+65-6-278-8955 Fax:+65-6-278-0965 <http://www.fujikura.com.sg>

Fujikura Europe Ltd.

C51 Barwell Business Park, Leatherhead Road, Chessington, Surrey KT9 2NY, UK
Phone:+44-20-8240-2000 Fax:+44-20-8240-2010 <http://www.fujikura.co.uk>

AFL

260, Parkway East, Duncan, SC29334, USA
Phone:+1-800-235-3423 Fax:+1-800-926-0007 <http://www.afglobal.com>

Fujikura (China) Co., Ltd.

7th Floor, Shanghai Hang Seng Bank Tower, 1000 Lujiazui Ring Road, Pudong New Area, Shanghai, 200120 CHINA
Phone:+86-21-6841-3636 FAX +86-21-6841-2070